

Novaflex®

Flour Suction & Discharge Hose

Novaflex 6200

Flour Suction Hose

Designed for the transfer of dry edible food products such as sugar, flour, beans etc. Use of helix wire is recommended for static dissipation. This ultra smooth microbe resistant tube is built on special stainless steel mandrels for cleanliness.

Specifications

Tube: 3/16" White FDA natural rubber.

Reinforcement: Plies of polyester tire cord with helix wire

Cover: Corrugated SBR grey high grade weather and abrasion resistant synthetic rubber

Length: 100 ft.

Temperature Range Up to +160°F (+71°C)



Novaflex 6201

Flour Discharge Hose (3/16" tube)

Designed for the transfer of dry edible food products such as sugar, flour, beans etc. This ultra smooth microbe resistant tube is built on special stainless steel mandrels for cleanliness.

Specifications


Tube: White FDA natural rubber.

Reinforcement: Plies of polyester tire cord with static wire.

Cover: Grey SBR high grade weather and abrasion resistant rubber

Length: 100 ft.

Temperature Range: Up to +160°F (+41°C)

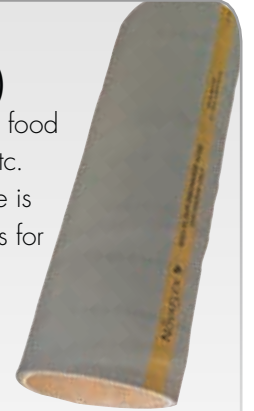

Part No.	I.D.	O.D.	Plies	WP psi	WT LBS/FT
6200WG-02000-00	2	2.85	2	100	1.53
6200WG-03000-00	3	3.88	2	100	2.52
6200WG-04000-00	4	4.96	2	100	3.76
6200WG-05000-00	5	5.96	2	100	5.13
6200WG-06000-00	6	7.10	2	100	6.37

Part No.	I.D.	O.D.	Tube Thickness	Plies	WP psi	WT LBS/FT
6201WG-03000-00	3	3.70	3/16	2	100	1.95
6201WG-04000-00	4	4.70	3/16	2	100	2.5
6201WG-05000-00	5	5.70	3/16	2	100	3.35
6201WG-06000-00	6	6.79	3/16	2	100	3.88

The information provided within is for informational purposes only. We have made every effort to ensure the accuracy of the provided information and assume no responsibility for any loss or damage due to errors or omissions or to the use or misuse of any information supplied. It is impossible to test all products under all conditions to which they might be subjected in the field. It is therefore the buyer and/or end users' responsibility to test all products under the conditions that duplicate the service conditions prior to installation. All improvements, all specifications are subject to change without prior notice. It is the buyer and/or end users' responsibility to review our complete

Terms and Conditions of Sale located on our web sites at: www.novaflex.com | www.z-flex.com | www.flexmaster.com.

10.2021

IN USA

North Carolina

449 Trollingwood Road
Haw River, NC 27258
tel (336)578-2161
fax (336)578-5554
800-334-4270

New Jersey

1024 Industrial Drive
West Berlin, NJ 08091
tel (856)768-2275
fax (856)768-2385
800-225-0215

Indianapolis

7812 Moller Road
Indianapolis, IND 46268
tel (317)334-1444
fax (317)334-1535
800-526-6288

IN CANADA

Ajax, Ontario

555 Beck Crescent
Ajax, ON L1Z 1C9
tel (905)686-5200
fax (905) 686-8349
800-563-3539

IN U.K.

Bromborough, Wirral

18 Plantation Park 2, Power Road
Bromborough, Wirral UK CH62 3QT
tel 44(0)151-334-0873
fax 44(0)151-334-7145
www.novaflex.co.uk Email: sales@novaflex.co.uk