



**Vertical**

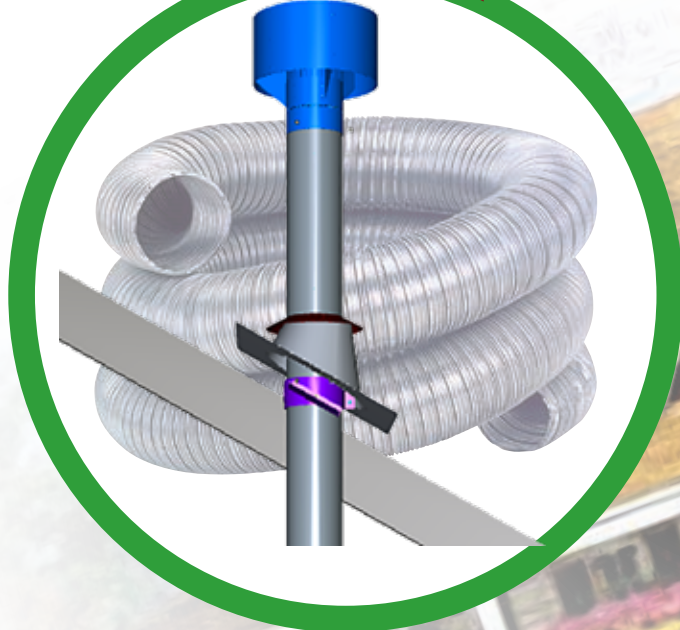

**Horizontal**

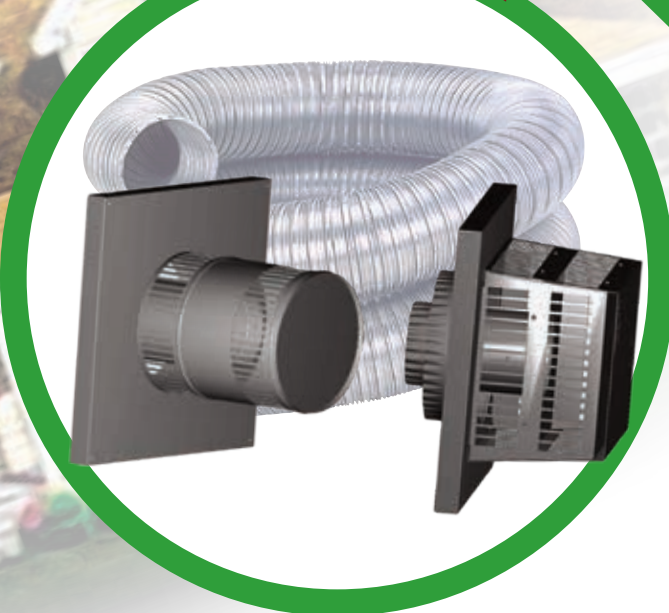

**Model DVK-VX**  
**Coaxial Flexible Direct Vent Kit**  
**with Vertical Extreme Weather**  
**Termination**

**Kit also includes:**

- Coaxial Flexible Vent
- Spacers & Supports
- Fire Stop/Insulation Shield
- Insulation Collar
- Rigid Pipe with Roof Support
- Flashing for 0° to 30° Pitched Roof
- Storm Collar/Support
- High Temperature Sealant
- Self-Drilling Screws

**Model DVK-HR**  
**Coaxial Flexible Direct Vent Kit**  
**with Horizontal ROUND**  
**Termination**

**Kit also includes:**

- Coaxial Flexible Vent
- Spacers & Supports
- High Temperature Sealant
- Self-Drilling Screws

**Model DVK-HT**  
**Coaxial Flexible Direct Vent Kit**  
**with Horizontal SQUARE**  
**Termination**


**Kit also includes:**

- Coaxial Flexible Vent
- Spacers & Supports
- High Temperature Sealant
- Self-Drilling Screws

**Coaxial FLEXIBLE Direct Vent Kits**

- Z-Flex<sup>®</sup> DVK Kits are designed to ease gas burning fireplace or insert installations
- Allows for a completely sealed system that does not compromise indoor air quality
- Kit includes two TRIPLE LOCK<sup>®</sup> flexible vents, one for flue exhaust, the other for combustion air
- Available in coaxial vertical extreme weather, horizontal round or square termination options

# DVK Kits

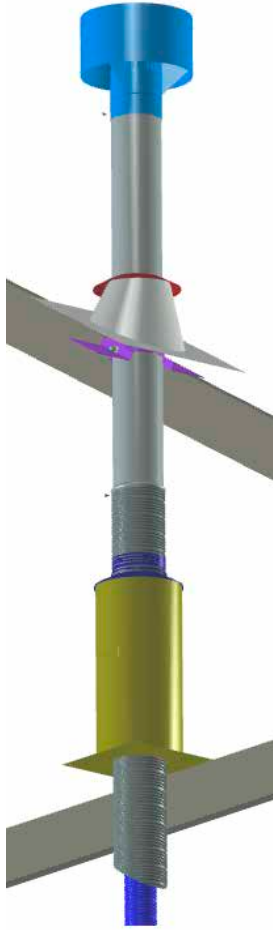

Typical Vertical Installation: 2DVK-VX



Typical Horizontal Installation: 2DVK-HR

# Accessory Kits

## Coaxial Flexible Extension Kit

P/N's: 2DVK (305, 406, 407, 508, 811) 20X

Coaxial Flexible Coupling  
20 Ft. Coaxial Flexible Vent  
Spacers & Supports  
Sealant & Self-drilling Screws

## Coaxial Flexible Coupling Kit P/N's:

2DVK (305, 406, 407, 508, 811)C

Coaxial Flexible Coupling  
Sealant & Self-drilling Screws

## Coaxial Flexible Spacer Kit (10/kit)

P/N's: 2DVK (35, 46, 47, 58, 811)S

**Adaptor DV 4/6.625 to Flex 4/7 Kit** P/N: 2DVK407A or  
**Adaptor DV 5/8 to Flex 5/8 Kit** P/N: 2DVK508A

Adaptor  
Sealant & Self-drilling Screws

## Coaxial Flexible Support Kit (5/kit)

P/N's: 2DVK (05, 06, 07, 08, 11)SUP

**Wall Thimble** (for 4" to 7" thick walls)

P/N's: 2DVK (05, 06, 07, 08, 11)WT

**Wall Thimble Extended** (for 6" to 11" thick walls)

P/N's 2DVK (05, 06, 07, 08, 11)WTE

**Siding Standoff** P/N's: 2DVK (05, 06, 07, 08, 11)SS

**Fire Stop** P/N's: 2DVK (05, 06, 07, 08, 11)FS

Fire stop sealant is field supplied

**Fire Stop/Insulation Shield & Insulation Collar Kit**

P/N's: 2DVK (05, 06, 07, 08, 11)FSIS

Fire stop sealant is field supplied

**Flashing 30 to 45 Degree Pitched Roofs**

P/N's: 2DVK (05, 06, 07, 08, 11)F

**Rigid Extension Pipe Kit** P/N's: 2DVKRE(35, 46, 47, 58, 811)

30" Long Rigid Exterior & Flexible Inner Pipe with Male Connector  
Guy Band  
Sealant & Self-drilling Screws

**Sealant P/N: 2DVK S**

## Z-Flex Coaxial FLEXIBLE Direct Vent Kits

Part ID	Description
2DVK(305,406,407,508,811)(05,10,20,40)VX	Direct Vent Kit Vertical Extreme Weather Termination
2DVK(305,406,407,508,811)(05,10,20,40)HR	Direct Vent Kit Horizontal ROUND Termination
2DVK(305,406,407,508,811)(05,10,20,40)HT	Direct Vent Horizontal SQUARE Termination

\* Select appropriate coaxial vent diameters in inches; (305,406,407,508,811) and length in feet;(05,10,20,40) when ordering, additional lengths available upon request